









The experience OF 0/ens.





The Executive Management of Improving its production technology continuously in the domestic and global market since 1979, believes in the necessity of an effective Quality Management System in order to retain customer satisfaction at the top level today and hereinafter.

System is applied in conformity with ISO 9001:2008 CE, Quality, BSCI, Ghost, Standard and TSE to the whole Enterprise that takes active role in all production phases and takes advantage of the latest technologies. In pursues the objective of continuous and sustainable system development through extensive sector experience, complying with the legal obligations and protecting the employee rights.

In this context, our quality goals should be set, pursued and reported. Our resources should serve to our objectives.

Livinox was born as a brand name by **LITE**, for export stainless steel kitchen sinks.





TOUGHER; more durable than porcelain /cast iron. KEEPS IT LUSTER; won't rust, stain or fade. Finish resists scratches. Hand-buffed finish keeps luster long after other materials show their age. ABSORBS SHOCK; Stainless steel composite "gives" on impact to cushion glasses and dishes against breakage.

EASY TO KEEP CLEAN; Retains original luster when cleaned with household cleanser and soft towel. Sanitary surface just one reason healthcare facilities trust Kromevye sinks.

GREATER BOWL CAPACITY; The strength and flexibility of for deeper sinks bowls. More usable space overall than cast iron or porcelain. **COMPLEMENT ANY DECOR;** Clean lines and cool textures reflect surrounding colors and patterns. Stainless steel complements your decor and composite complete your decoration with many

MATERIAL; AISI 304 18/8 cr.ni. Stainless steel. High granite composite, tempered glass.














Installation Pofiles

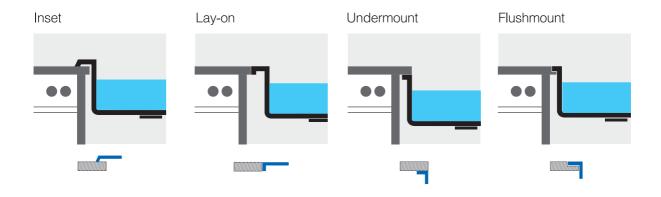

Place the sink upside down in the position where it is to be installed, and trace the outline of the sink on the counter top with pencil.

Draw another line 10 mm inside the first line. Cut a hole in the counter top following this second, inner, line. (*If a pattern is included in the package, then use it to cut the hole in the counter top.)

Adhere the sealing tape around the under side of the edge of sink, starting not at a corner, but any other random spot. Ensure that the tape is sealed smoothly at the bottom of the rim between the clip rail and the edge of the perimeter of the sink. In case that the packaging includes a spongy sealing tape, adhere the tape closer to the edge of the sink, being careful not to overhang it.

Place the fixing clips evenly space around the perimeter of the sink. and pull them up to lock into their horizontal position. To place the sink into the work top, push the metallic part of the clips inward.

These fixing clips are designed to be used in counter tops 30-40 mm. If your counter top is thinner, insert wooden wedges between the counter top and the clips so as to secure them.

Use a hand screwdriver to screw partialy the fixing clips by following the order that the drawing indicates. When all the clips have been relatively secured in place, repeat the procedure by tightening completely each fixing clip.


Stainless Composite Steel Finishes Colors

Glass Colors





Polished





Microlinen



White



Sahra



Black



Extra clear white



Black

Our products are made by AISI 304 18/8 cr.ni. If you follow below mentioned kitchen sink maintenance instructions, stainless steel will keep its fine and clean appearance at all times.









After using the kitchen sink wipe off stains, rinse with water and scrub with dry cloth. Use **LIT** inox wax produced for steel products periodically surface polishing paste. After cleaning the surface with **LIT** inox wax applied to a soft cloth or sponge, rinse it with plenty of water and then dry the surface.

Acids, silver cleaning material, salty solutions and wall paper adhesives usually leave stains within couple of hours of their use. If this type material ever touches the kitchen sink after cleaning them immediately, rinse with plenty of water and dry the surface with cloth.

Do not leave wet metal products made of iron or similar material that can easily get rusted on the kitchen sink for long periods of time. The rusts of those leave stains on the surface of kitchen sink.

DO NOT USE THESE; Cleaning / scrubbing powder, hard cleaning sponges and brushes that scratch the surface of the kitchen sink.

Sometimes scratches may appear on surface during normal use, but they do not lower the quality of kitchen sink. A very thin layer of oxidation appears on the surface of stainless steel which provides protection against corrosion and erosion.



Index

- Page 16/22



































- Page 41/46





















Triton 196 50 x 58 cm
































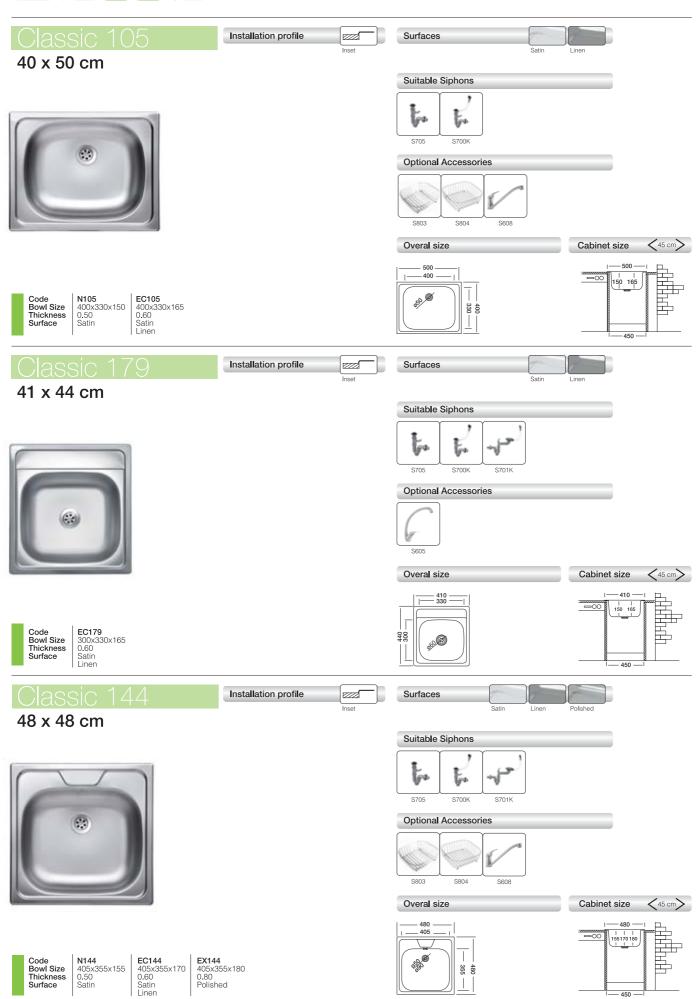


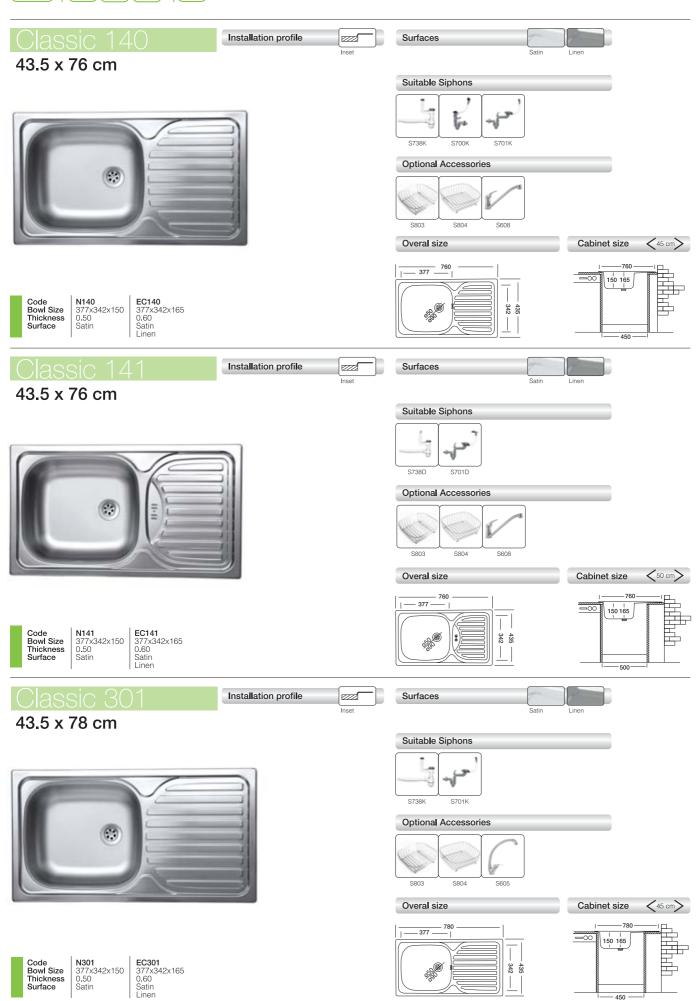

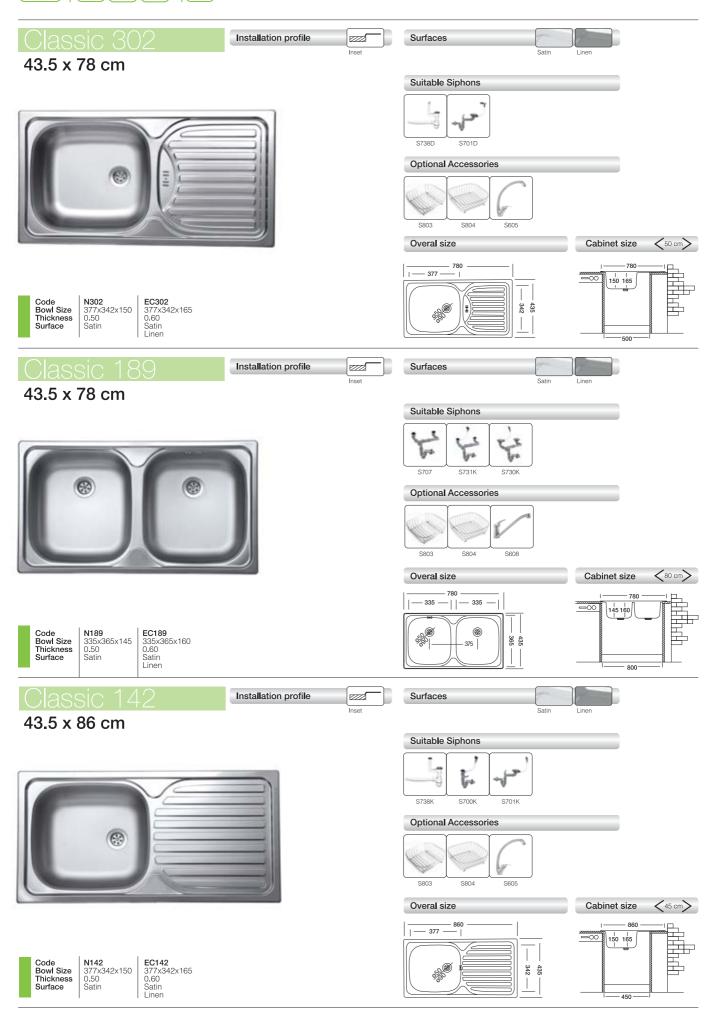


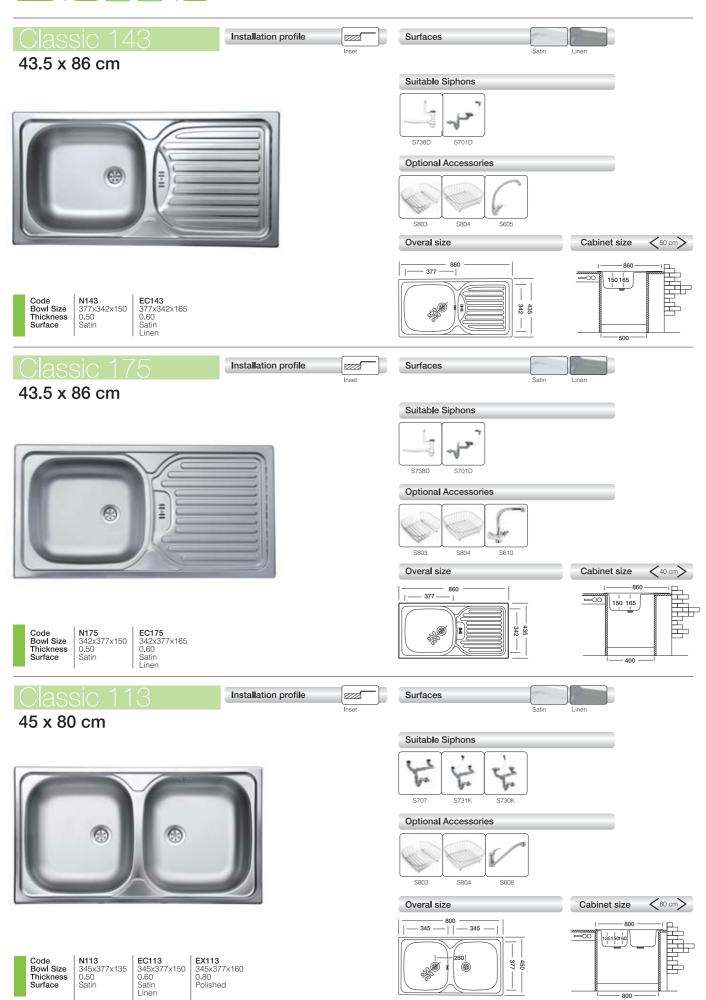


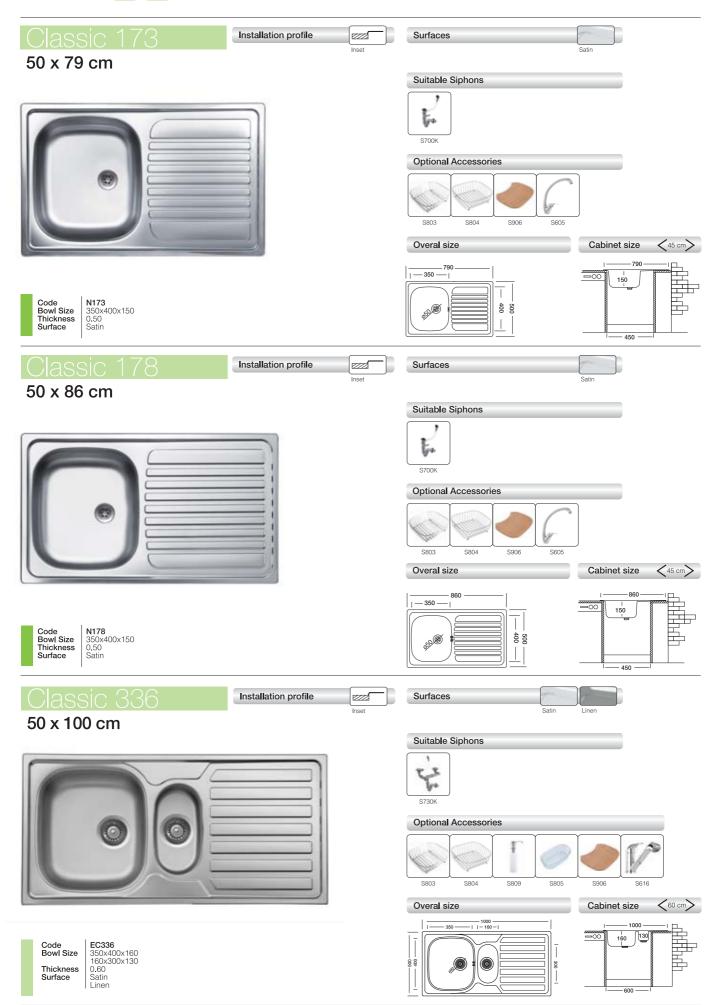


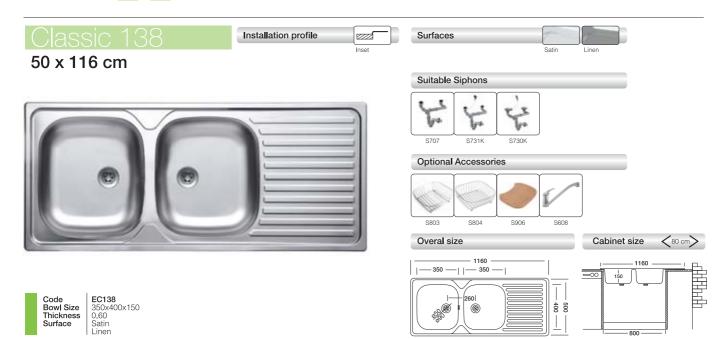




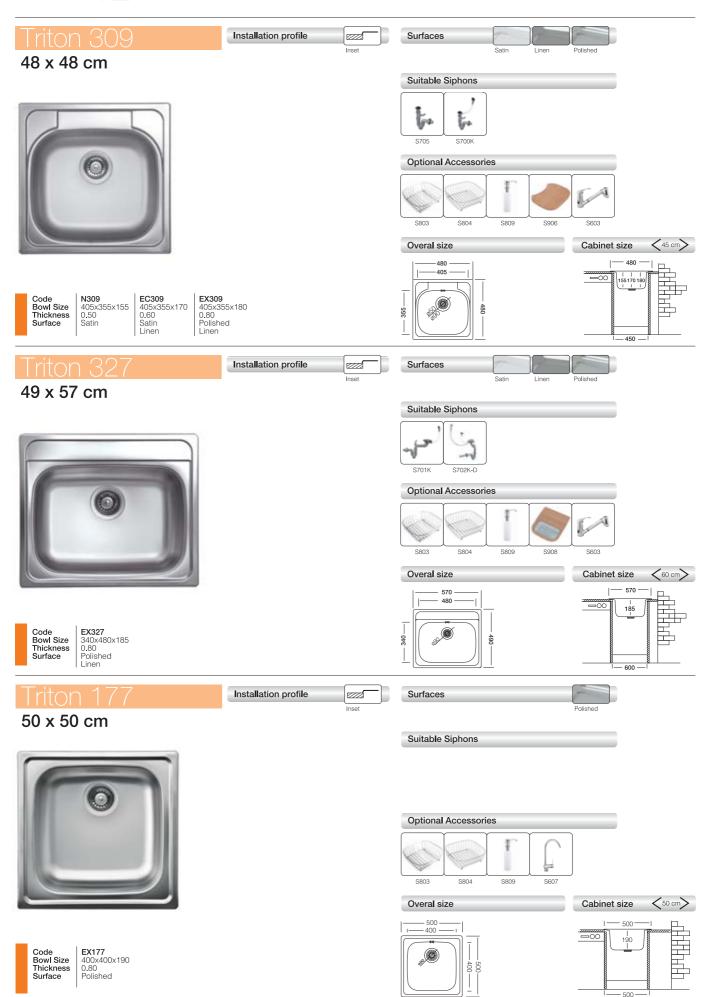


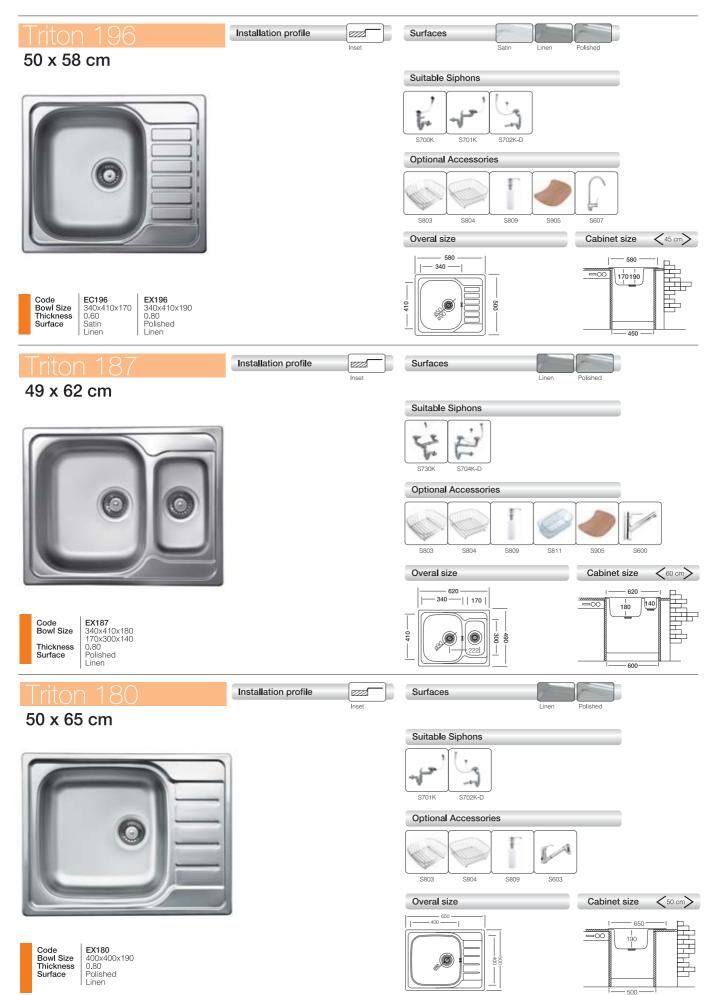

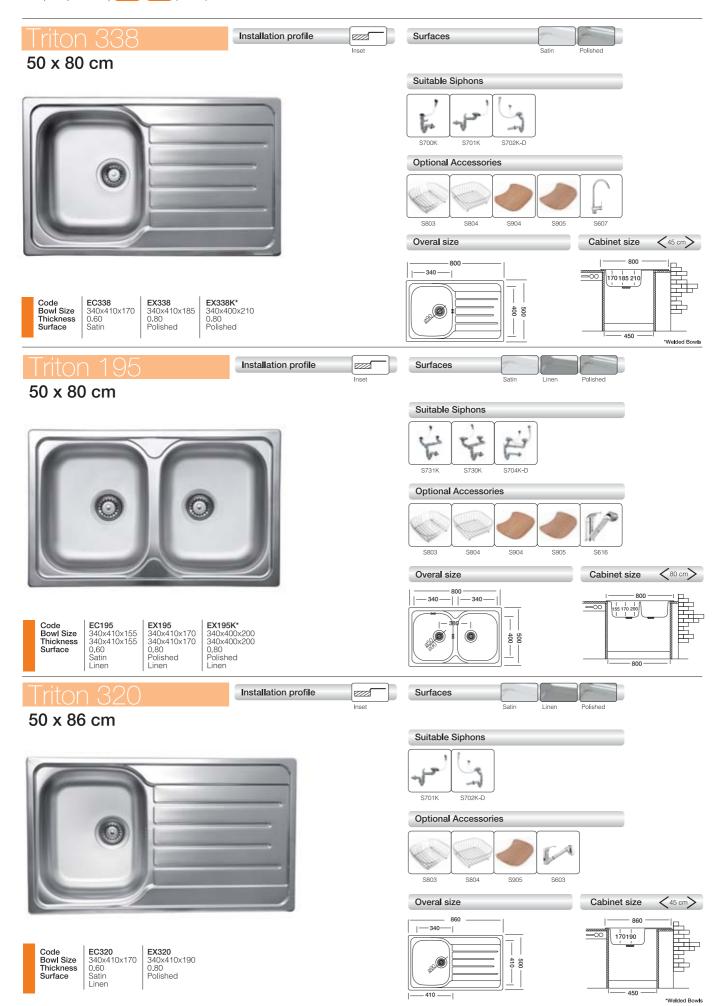

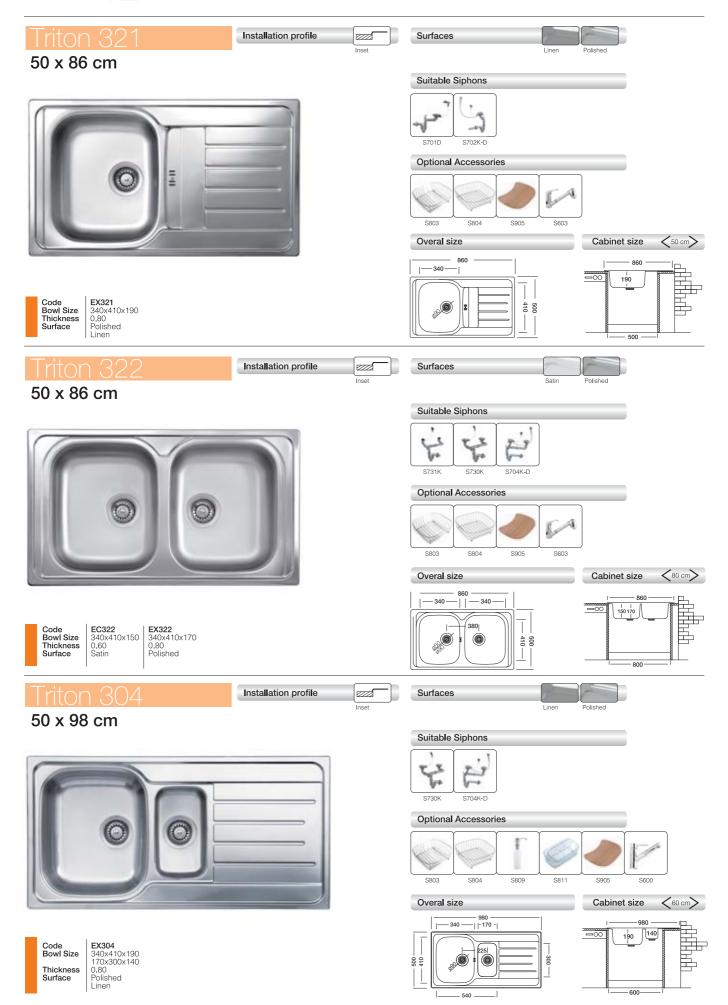




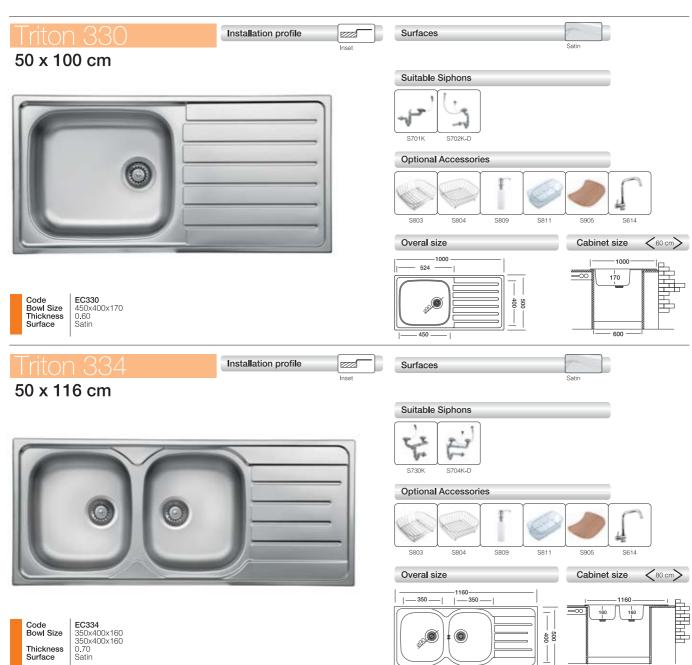







Lau-on 40-50's

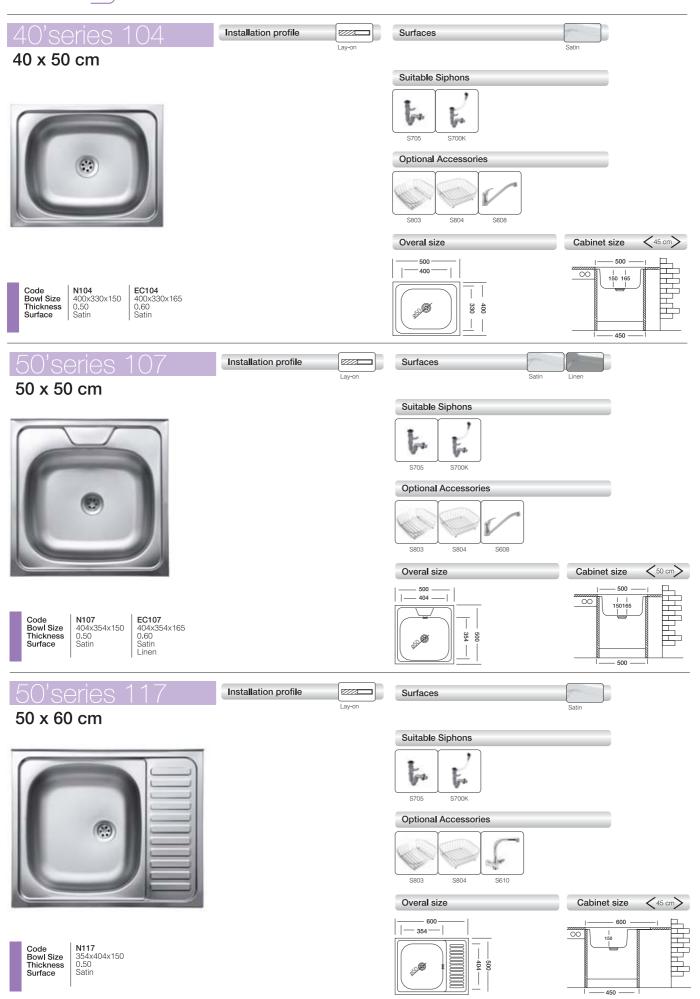

Lay-on 50's

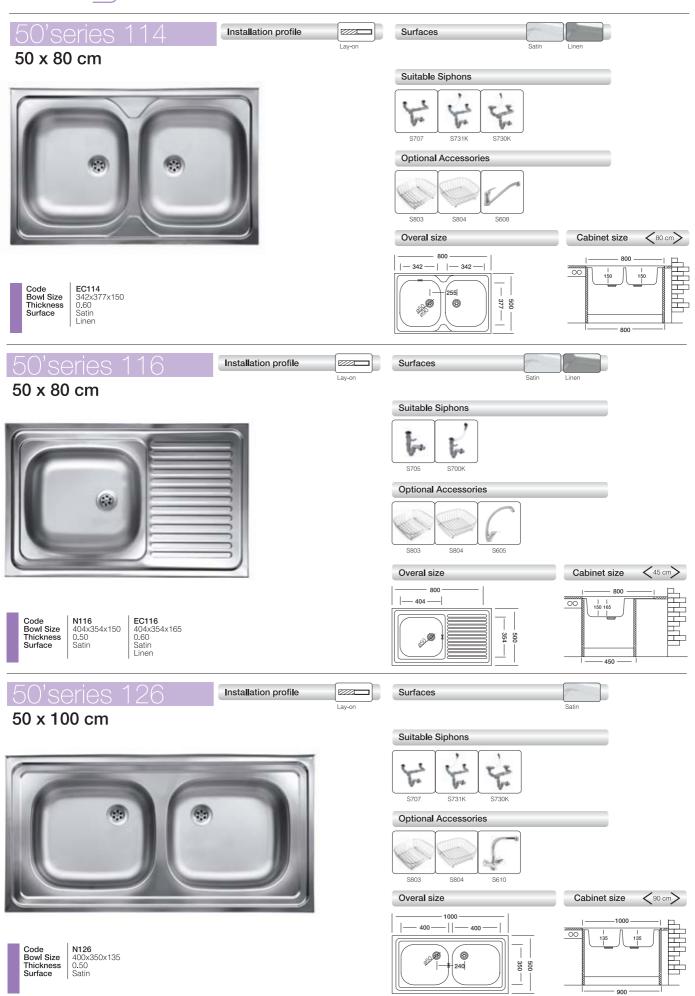

Lay-on 50's

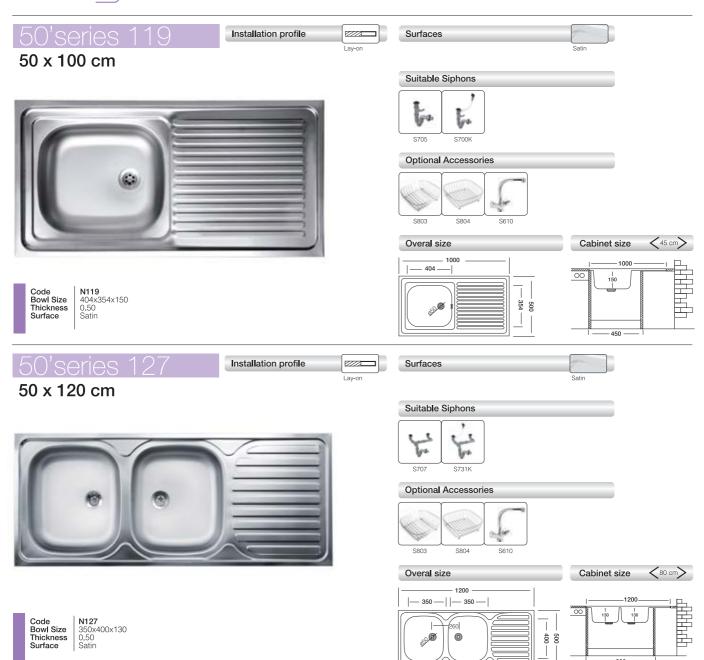

0 @ OO **©**° 0 0.00 0

PREMIUM LINE



Special water saving perlator (Bubble flow, with Lime breaker, Flow rate: 8 I/min), Special cartridge with heat and flow rate adjustment- With swivel spout, Length of outlet 190 mm, Height of outlet 295 mm, Measurements of Hot & Cold water flex hose connection are M10x1- 3/8"40 cm, Ideal operation pressure is 3 - 4 Bar




Special perlator with water saving (Bubble flow, with Lime breaker, Flow rate: 8 I/min), Special cartridge with heat and flow rate adjustment, With swivel spout, Length of outlet is 195 mm, Height of outlet 275 mm, Measurements of Hot & Cold water flex hose connection are M10x1- 3/8"40 cm, Ideal working pressure is 3-4 bar



Special water saving perlator (Bubble flow, with Lime breaker, Flow rate: 8 I/min), Special cartridge with flow rate adjustment - With swivel spout, Length of outlet is 190 mm - Height of outlet is 255 mm, Measurements of Hot & Cold water flex hose connection are M10x1- 3/8"40 cm. Ideal operation pressure is 3 - 4 Bar




Special water saving perlator (Bubble flow, with Lime breaker, Flow rate: 8 I/min), Special cartridge with heat and flow rate adjustment- With swivel spout, Length of outlet 190 mm, Height of outlet 295 mm, Measurements of Hot & Cold water flex hose connection are M10x1- 3/8"40 cm, Ideal operation pressure is 3 - 4 Bar




Special water saving perlator (Bubble flow, with Lime breaker, Flow rate: 8 I/min). Special cartridge with heat and flow rate adjustment- With swivel spout, Length of outlet 190 mm, Height of outlet 295 mm, Measurements of Hot & Cold water flex hose connection are M10x1- 3/8"40 cm, Ideal operation pressure is 3 - 4 Bar

CLASSIC LINE








Special perlator with water saving, Special cartridge with heat and flow rate adjustment, With swivel spout, Removable hand shower head with 2 functions (Rain, Straight flow), Length of outlet is 225 mm - 125 cm helical hose (brass) - Height of outlet is 140 mm, Measurements of Hot & Cold water flex hose connection are M10x1-3/8"40 cm, Ideal working pressure is 3-4 bar



Special perlator with water saving (Bubble flow, with Lime breaker, Flow rate: 8 I/min), Special cartridge with heat and flow rate adjustment - With swivel spout, Length of outlet is 170 mm - Height of outlet 215 mm, Measurements of Hot & Cold water flex hose connection are M10x1-3/8"40 cm, Ideal working pressure is 3-4 bar



Special perlator with water saving (Bubble flow, with Lime breaker, Flow rate: 8 I/min), Special cartridge with heat and flow rate adjustment - With swivel spout, Length of outlet is 200 mm, Height of outlet 150 mm, Measurements of Hot & Cold water flex hose connection are M10x1-3/8"40 cm, Ideal working pressure is 3-4 bar



Special perlator with water saving (Bubble flow, with Lime breaker, Flow rate: 8 I/min), Special cartridge with heat and flow rate adjustment - With swivel spout, Length of outlet is 200 mm, Height of outlet 150 mm, Measurements of Hot & Cold water flex hose connection are M10x1-3/8"40 cm, Ideal working pressure is 3-4 bar

GRANITE KITCHEN TAPS



Sahra color kitchen mixer. Special perlator with water saving. 35 Ø cartige.



Sahra color kitchen mixer. Removable hand shower head with 2 functions (rain, straight flow). Special perlator with water saving. 40 Ø cartige.



Nero color kitchen mixer. Special perlator with water saving. 35 Ø cartige



Beige color kitchen mixer. Removable hand shower head with 2 functions (rain, straight flow). Special perlator with water saving. 40 Ø cartige.



Nero color kitchen mixer. Special perlator with water saving. 35 Ø cartige



Nero color kitchen mixer. Removable hand shower head with 2 functions (rain, straight flow). Special perlator with water saving. 40 Ø cartige.

Siphons

S705



Ø 50 mm valve waste siphon without overflow



Ø 50 mm valve waste siphon with overflow from bowl

S700D



Ø 50 mm valve waste siphon with overflow from drainer





Ø 50 mm valve waste siphon with overflow from bowl

S707



Ø 50 mm Double valve waste siphon without overflow

S731K



Ø 50 mm valve waste double siphon with/without o/f

S701K



Ø 90 mm Valve siphon with overflow from bowl

S738D



Ø 50 mm Valve siphon with overflow from drainer

S701D



Ø 90 mm Valve waste siphon with overflow from drainer

S730K



Ø 90 mm Double valve waste siphon with/ without overflow

S730D



Ø 90 mm Double valve waste siphon with overflow from drainer

S740K



Ø 90mm single waste siphon with overflow composite sinks siphon

S719K



Ø 90 mm Triple valve waste siphon with overflow from bowl

S702K-D



Ø 90 mm Pop up vaste valve big head siphon with/o/f

S704K-D



Ø 90 mm Double pop up vaste valve big head siphon with/o/f

S741K



Ø90mm double waste siphon with overflow composite sinks siphon

S742K



Ø 90mm double waste siphon with overflow composite sinks siphon

S743K



Ø 50mm small head siphon with chain overflow from bowl

S744D



Ø 50mm small head siphon with overflow from drainer

S717



Ø 50mm Lavatory flower siphon

S710



Ø 50mm Bathroom tray siphon

S816



Strainer for Ø 90mm Walve siphons

Modessonies

BASKETS









COLANDERS







FIXING EQUIPMENT













CHOPPING BOARDS

















OTHERS





